

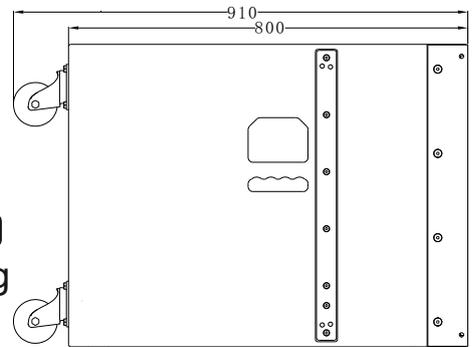


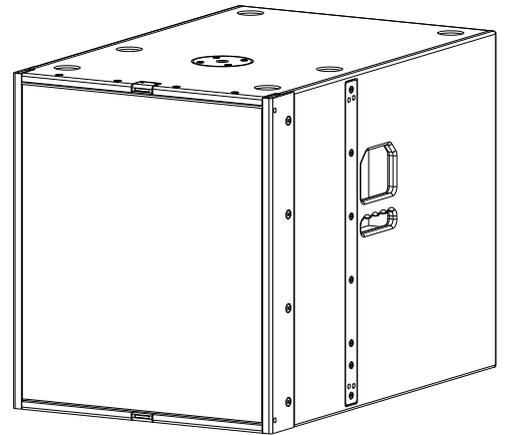




B-18RV SUBWOOFER

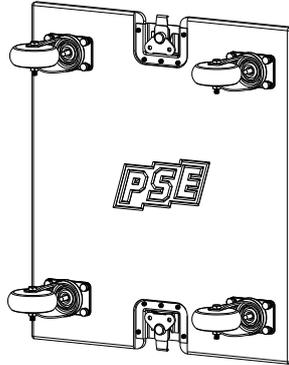

Features B-18RV

- 18" Speaker (5"/125mm voice coil)
- bass reflex design
- rigging (flying) hardware integrated
- M20 pole mount plate
- 4 steering caster on the back side
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white
- optional without wheels
- optional front board with butterfly locks
- optional detto. with 4 steering caster

SYSTEM 530 for stacking and rigging

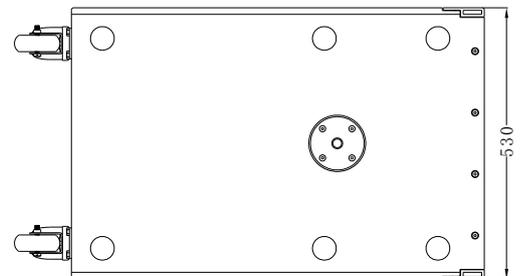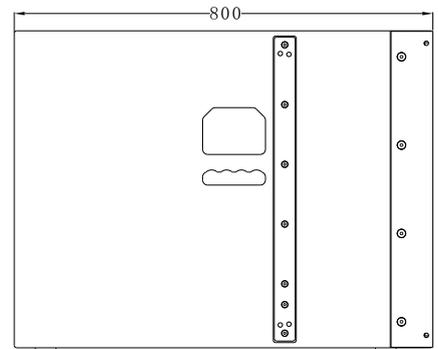

specification

model	B-18RV
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1500W / 4500W*
available frequency response**	32Hz-180Hz
max. sound pressure level***	137dB
LF-transducer rated size	18"
LF-transducer voice coil diameter	5"/125mm
LF-transducer magnet structure	ferrite
dimension w/h/d in mm	530/610/800
weight	55kg

* peak 10ms, with TD-8000 amplifier and B-18RV max controller setup

** -10dB with B-18RV FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and B-18RV SPL controller setup