



**touring cart  
X-ray 8  
ZAMT025**  
to carry assembled  
X-ray 8 arrays




**bags X-ray 8  
ZB00020**  
to protect 1 X-ray 8  
**ZB00021**  
to protect 3 units  
X-ray 8 (trolley carry)  
**ZB00022**  
to protect 4 units  
X-ray 8 (trolley carry)

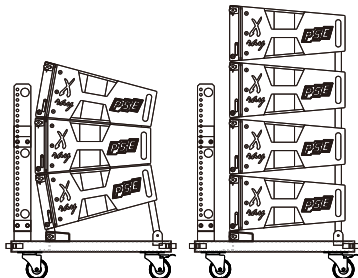


**touring case  
1 pc. X-ray 8  
horizontal  
ZCX8006**

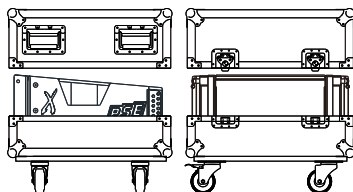


**touring case  
2 pc. X-ray 8  
horizontal  
ZCX8007**

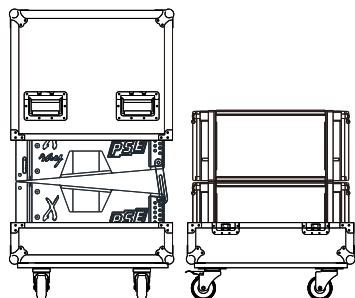


**touring case  
3 pc. X-ray 8  
horizontal  
ZCX8008**

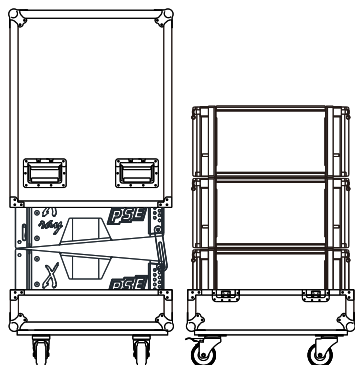


**touring case  
4 pc. X-ray 8  
horizontal  
ZCX8009**

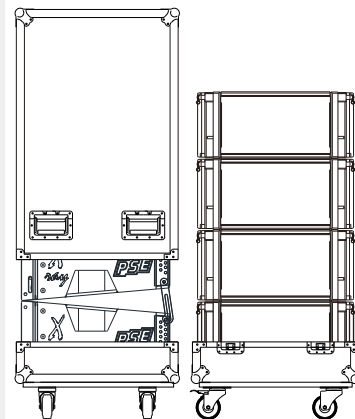


**touring case  
2 pc. X-ray 8  
face down  
ZCX8010**

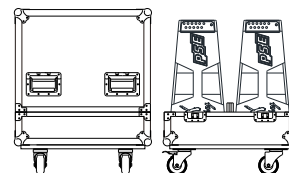


**touring case  
3 pc. X-ray 8  
face down  
ZCX8011**

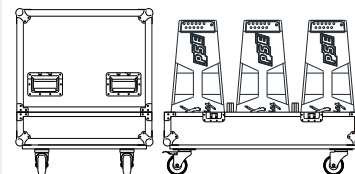

**touring case  
3 pc. X-ray 8  
upright  
ZCX8012**

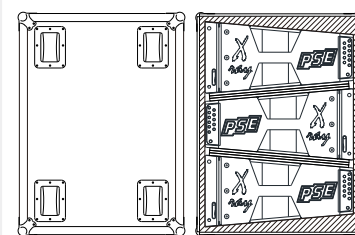


**touring case  
4 pc. X-ray 8  
upright  
ZCX8013**

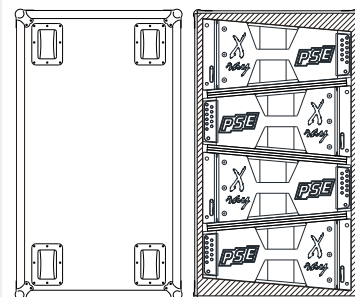


## flying frame XL ZLAH153

L: 1041 mm for very big size X-ray 8 arrays or X-ray 8 sub arrays

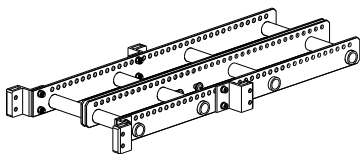


## flying frame L ZLAH152

L: 751mm for large size X-ray 8 arrays or X-ray 8 sub arrays

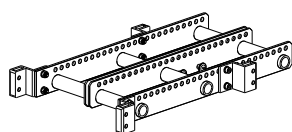


## flying frame M ZLAH151

L: 550mm for medium size X-ray 8 arrays or X-ray 8 sub arrays

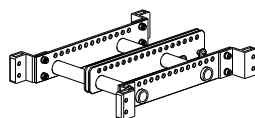


## light frame ZLAH150

for small size X-ray 8 arrays and X-ray sub or pole mount of X-ray 8



## load adapter type A1 (slot) ZLAH033

for multi point rigging on the steel panels left and right of the frame




## load adapter type B1 (tongue) ZLAH034

for one point rigging in the center of the frame



## load adapter type C ZLAH037

for light frame only



## tripod adapter ZLAH050

for light frame only




## case flying frame for 2 pcs. flying frame ZCX8000

for M-size frames  
ZCX8001

for L-size frames  
ZCX-8002

for XL-size framens

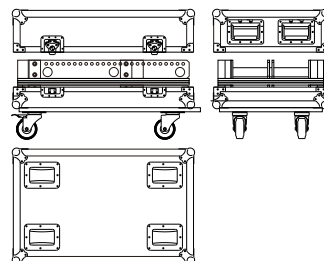


## case flying frame 2 pcs. frame + cable ZCX8003


for M-size frames  
ZCX8004

for L-size frames  
ZCX-8005


for XL-size framens

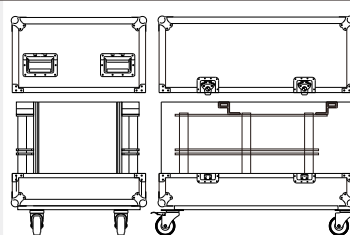


## shackle 1t (11mm) ZAMT205 screw bolt




## shackle 1t (11mm) ZAMT208 with nut and splint




## shackle 2t (16mm) ZAMT210 with nut and splint



## chain link 8mm ZAMT320




## oval rigging link 2.1t (16mm) inner diameter: 60mm x 110mm ZAMT305



## nylon loops with steel rope inlay 2000kg load capacity without additional safety needed: 850kg load capacity

l: 0.5m ZLAH200  
l: 1m ZLAH201  
l: 1.5m ZLAH202  
l: 2m ZLAH203  
l: 2.5m ZLAH204  
l: 3m ZLAH205

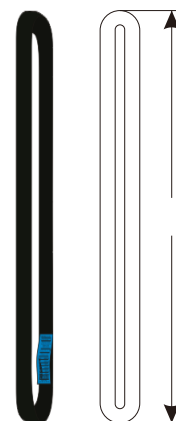

# X-ray 8

## accessories

### cable and miscellaneous

#### speaker cable

speakon-speakon 2x4<sup>2</sup>

- l: 0,5m **ZK4240BX01**
- l: 0,8m **ZK4240BX04**
- l: 5m **ZK4240BX09**
- l: 8m **ZK4240BX10**
- l: 10m **ZK4240BX11**
- l: 15m **ZK4240BX13**
- l: 20m **ZK4240BX14**
- l: 25m **ZK4240BX15**
- l: 30m **ZK4240BX16**

other cable type, other length and cable by the meter on request



#### signal and patch cable

XLR-XLR black cable

- l: 0,3m **ZKSGXLRB01**
- l: 0,5m **ZKSGXLRB02**
- l: 0,8m **ZKSGXLRB03**
- l: 1m **ZKSGXLRB04**
- l: 2,5m **ZKSGXLRB05**
- l: 5m **ZKSGXLRB06**
- l: 10m **ZKSGXLRB07**
- l: 15m **ZKSGXLRB08**
- l: 20m **ZKSGXLRB09**


other cable type, other length and cable by the meter on request



#### cases for cables and accessories


**ZCSPZxxx**

customized cases: design, shape and color on demand

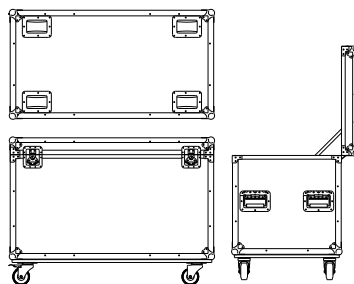


#### 19" touring racks

variations accordingly to the requested height are available  
**ZCRPxxHE**

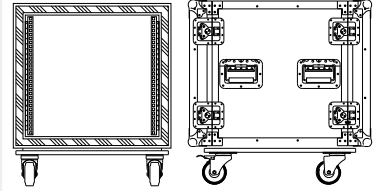


#### rack modules

- 2RU **ZCRM02HE**
- 3RU **ZCRM03HE**
- 4RU **ZCRM04HE**
- 5RU **ZCRM05HE**
- 6RU **ZCRM06HE**
- 8RU **ZCRM08HE**
- 10RU **ZCRM10HE**
- 12RU **ZCRM12HE**
- 14RU **ZCRM14HE**
- 16RU **ZCRM16HE**
- 18RU **ZCRM18HE**

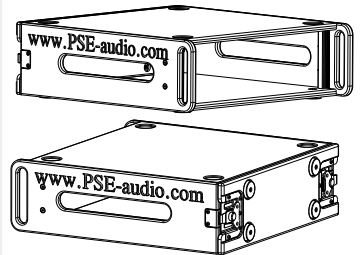

#### touring case rack modules

variations accordingly to the requested height are available  
**ZCSPZRMxx**

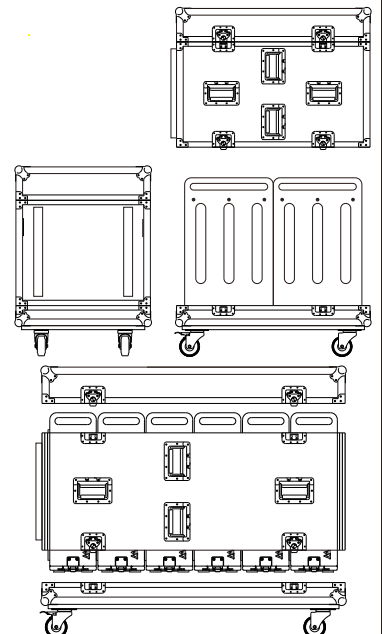

# X-ray 8 accessories amping and controller



## specification

| specification                  |                                                                       |         |         |                       |         |          |
|--------------------------------|-----------------------------------------------------------------------|---------|---------|-----------------------|---------|----------|
|                                | T-1500                                                                | T-2400  | T-3000  | TD-3000               | TD-5000 | TD-8000  |
| output power (prog. peak)** 2Ω | 2x1200W                                                               | 2x1900W | 2x2400W | 2x2400W               | 2x3800W | 2x6100W  |
| output power* stereo 4Ω        | 2x750W                                                                | 2x1200W | 2x1500W | 2x1500W               | 2x2500W | 2x4000W  |
| output power* stereo 8Ω        | 2x500W                                                                | 2x800W  | 2x1000W | 2x900W                | 2x1450W | 2x2400W  |
| output power* bridged 4Ω       | 1x2000W                                                               | 1x3200W | 1x3800W | 1x4000W               | 1x6300W | 1x10000W |
| output power* bridged 8Ω       | 1x1500W                                                               | 1x2400W | 1x3000W | 1x3950W               | 1x4100W | 1x6200W  |
| power supply                   | traditional with ring transformer                                     |         |         | switch mode           |         |          |
| amplifier electronic circuit   | class H2                                                              |         |         | class TD              |         |          |
| protection                     | soft start up, short circuit, DC fault, over heat, over load, limiter |         |         |                       |         |          |
| AC-Voltage                     | 220V-240V 50Hz                                                        |         |         | 160V-260V 50Hz        |         |          |
| dimension                      | 19"/ 2RU depth: 485mm                                                 |         |         | 19"/ 2RU depth: 440mm |         |          |
| weight                         | 18.5kg                                                                | 19.6kg  | 19.8kg  | 15.2kg                | 15.2kg  | 15.2kg   |

\* RMS 1000Hz / max. THD 1% \*\*stereo mode, one channel driven burst signal (program peak) \*\*\* burst signal (program peak)

## DSP controller




**SV-204 >>>> 2 in - 4 out**

**SV-306 >>>> 3 in - 6 out**


**SV-408 >>>> 4 in - 8 out**

**PPD 1**  
connecting and  
pach box  
ZE1900001

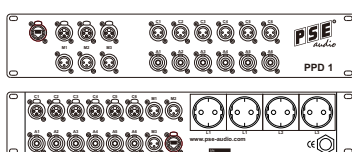


**touring amp rack  
type E**  
ZETR001

ready for plug and play  
1 x SV-306 controller  
2 x TD-5000 amplifier  
1 x T-2400 amplifier  
1 x PPD 1

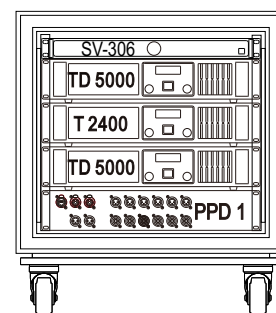

**touring amp rack  
type D**  
ZETR000

ready for plug and play  
1 x SV-306 controller  
2 x TD-5000 amplifier  
1 x PPD 1

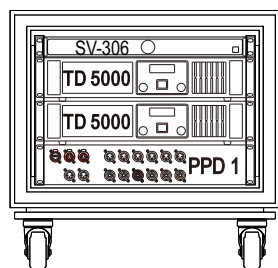

**touring amp rack  
type F**  
ZETR002

ready for plug and play  
1 x SV-306 controller  
3 x TD-5000 amplifier  
1 x PPD 1

