


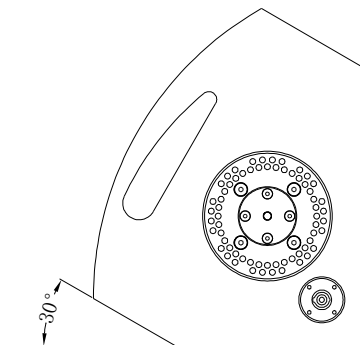
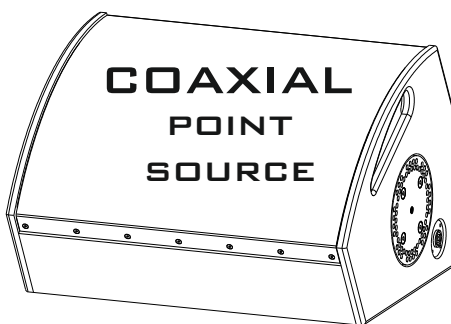


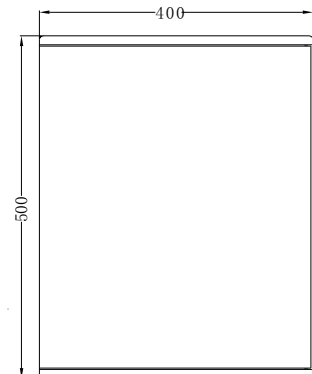

CX-12

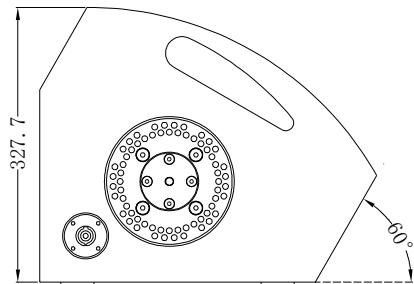

specification

| model | CX-12 |
|---|---------------|
| rated impedance | 8 Ω |
| operation mode | passive |
| power handling capacity passive AES/peak* | 500W / 1500W* |
| available frequency response** | 60Hz-20kHz |
| max. sound pressure level*** | 132dB |
| directivity (h x v) | 50° x 70° |
| LF-transducer rated size | 12" |
| LF-transducer voice coil diameter | 76mm/3" |
| LF-transducer magnet structure | ferrite |
| HF-compression driver rated size (VC) | 45mm/1.75" |
| HF-compression throat diameter | 1" |
| HF-compression magnet structure | ferrite |
| dimension h/w/d in mm | 500/400/366 |
| weight | 22kg |

* peak 10ms, with TD-8000 amplifier and CX-12 max controller setup


** -10dB with CX-12 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and CX-12 SPL controller setup


Features CX-12

- 1x12"/1.75" coaxial speaker
- 12" transducer 76mm /3" voice coil
- 12" transducer ferrite magnet
- compression driver 1.75"/45mm voice coil
- compression driver ferrite magnet
- high frequency horn 1" throat
- horn directivity 50° x 70°
- multifunction housing
- wedge angle 30° and 60°
- 2 M10 mounting points
- 2 multi gauge plate 360° / 5° steps
- tripod (pole mounting) flange
- 4 Neutrik speakon 4-pin
- speakon terminals at 3 sides of the cabinet
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating


small variety of wide range for bass cabinets extension



Disco and Pub



Live-music and touring



Touring and installation

Appliance CX-12

- high-mid unit for fix installation
- floor monitor
- near fill
- delay line

Application CX-12

- discotheque, clubs, bars, entertainment
- live events, live entertainment