

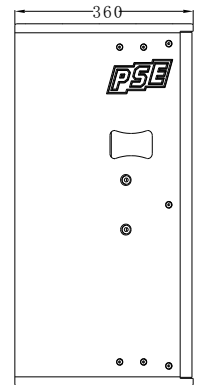
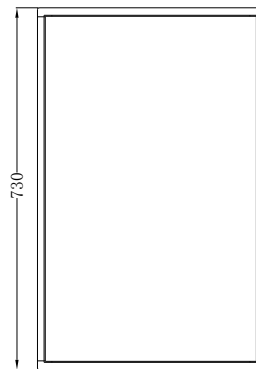



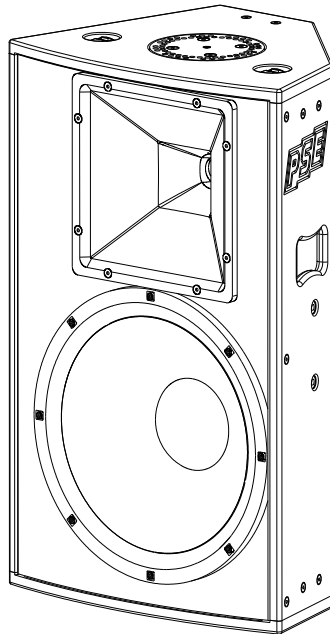

GS-15

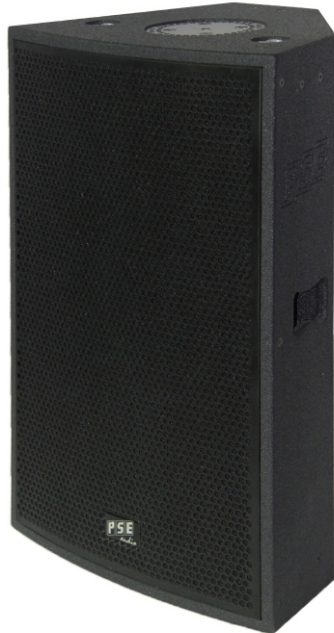

specification

model	GS-15
rated impedance	8 Ω
operation mode switchable	bi-amp/passive
power handling capacity bi-amp AES/peak*	1000W / 4000W*
power handling capacity passive AES/peak*	500W / 2000W*
available frequency response**	50Hz-20kHz
max. sound pressure level***	142dB
directivity (h x v)	90°/60° (90°rotatable)
LF-transducer rated size	15"
LF-transducer voice coil diameter	100mm/4"
LF-transducer magnet structure	neodymium
HF-compression driver rated size (VC)	75mm/3"
HF-compression throat diameter	1,4"
HF-compression magnet structure	neodymium
dimension h/w/d in mm	730/460/360
weight	28kg

* peak 10ms, with TD-8000 amplifier and GS-15 max controller setup

** -10dB with GS-15 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and GS-15 SPL bi-amp controller setup

Features GS-15

- 1x15" speaker neodymium (100mm voice coil)
- 1x3" (75mm) compression driver neodymium
- high frequency horn 1,4" throat
- horn directivity h90°/v60°
- 90° turnable high frequency horn to v60°/h90°
- multifunktional housing
- wedge angle 45°
- tripod (pole mounting) flange
- 7 air-lock mounting points
- 4 M8 mounting points
- 2 M10 mounting points
- 2 multi gauge plates 360° / 5° steps
- 2 Neutrik speakon 4-pin for passive
- 2 Neutrik speakon 8-pin for bi-amp
- passive / bi-amp switchable
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm, 27mm
- polyurea (PU) high scratch proof coating


Appliance GS-15

- high-mid unit for fix installation
- high-mid unit for mobile PA
- fullrange PA cabinet
- floor monitor
- near fill
- delay line

Application GS-15


- discotheque, clubs, bars, entertainment
- live events, live entertainment

small variety of wide range for bass cabinets extension




SB-18

Disco and Pub



LB-3

Live-music and touring



B-18

Touring and installation