

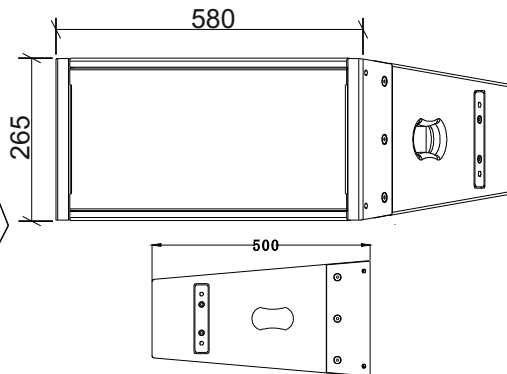
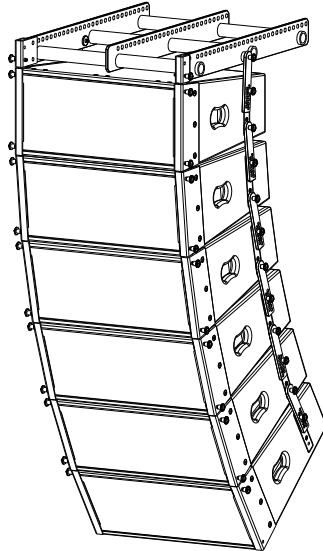


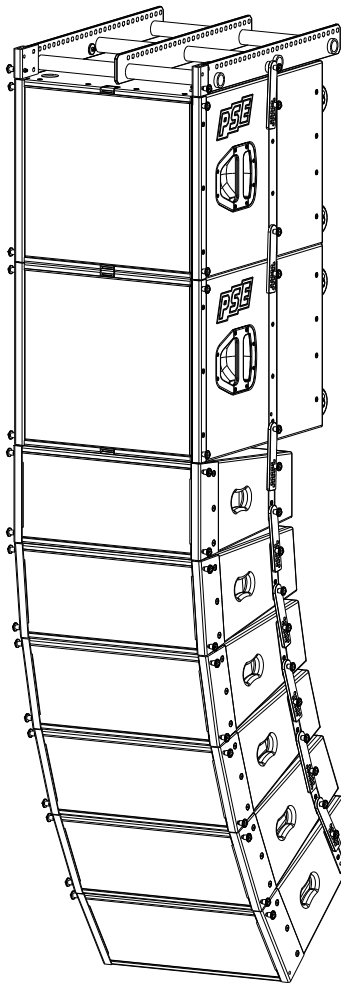

VECTOR-8 Line Array

2x8"/2.5" bi-amp



SYSTEM 580 for stacking and rigging

Features Vector 8

- 2x8" speaker (2.5" voice coil)
- 1x2.5" (63mm) neodymium compression driver
- high frequency planar wave guide horn
- wave guide horn directivity h110°/v10°
- constant horn directivity
- curving angles 0°-10° in 1° steps
- 4-point rigging structure
- 2 Neutrik speakon 4-pin
- speaker signal link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing 15mm and 28mm plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

specification	
model	Vector 8
rated impedance	16Ω (8Ω)
operation mode	bi-amp
power handling capacity midrange AES/peak*	500W / 1500W*
power handling capacity HF AES/peak*	60W / 180W*
available frequency response**	60Hz-20kHz
max. sound pressure level***	139dB
directivity (h x v)	110°/10°
midrange-transducer rated size	2x8"
midrange-transducer voice coil diameter	2.5" (64mm)
LF-transducer magnet structure	ferrite
HF-compression driver rated size (VC)	2.5" (63mm)
HF-compression throat diameter	1.4"
HF-compression magnet structure	neodymium
dimension w/h/d in mm	580/265/500
weight	27.8kg

* peak 10ms, with TD-8000 amplifier and Vector 8 max controller setup

** -10dB with Vector 8 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and Vector 8 SPL bi-amp controller setup

****system vertical directivity depends on quantity and curving of Vector 8 cabinets

extended system components

LB-3* Low-Mid Bass extension (1x18")

B-18 subwoofer (1x18")

VB-218 subwoofer (2x18")

*with rigging hardware

