






# SB-215 SUBWOOFER



## Features SB-215

- 2x15" neodymium speaker (4"/100mm voice coil)
- bandpass design
- 8 x M8 mounting points
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

## SYSTEM 800 for stacking and rigging

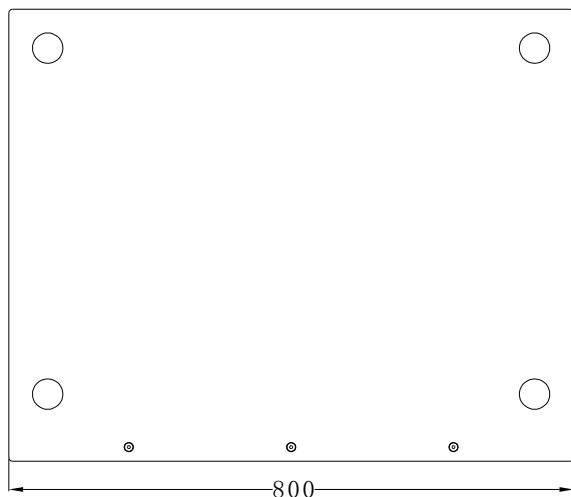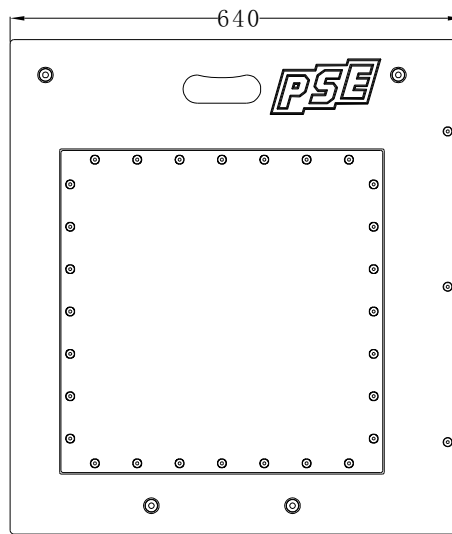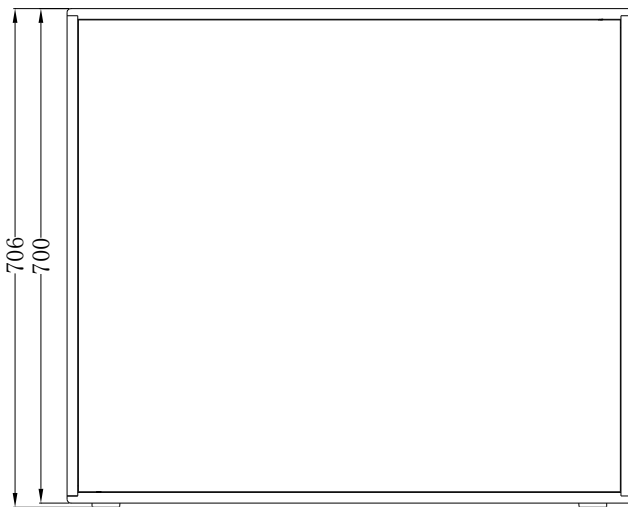

## specification

model	SB-215
rated impedance (optional)	8Ω (4Ω, 16Ω)
power handling capacity AES/peak*	2000W / 6000W*
available frequency response**	32Hz-180Hz
max. sound pressure level***	133dB
LF-transducer rated size	2x15"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	800/700/640
weight	62.9kg

\* peak 10ms, with TD-8000 amplifier and SB-215 max controller setup

\*\* -10dB with SB-215 FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and SB-215 SPL controller setup