




SB-215s

SUBWOOFER



super low-slung construction!

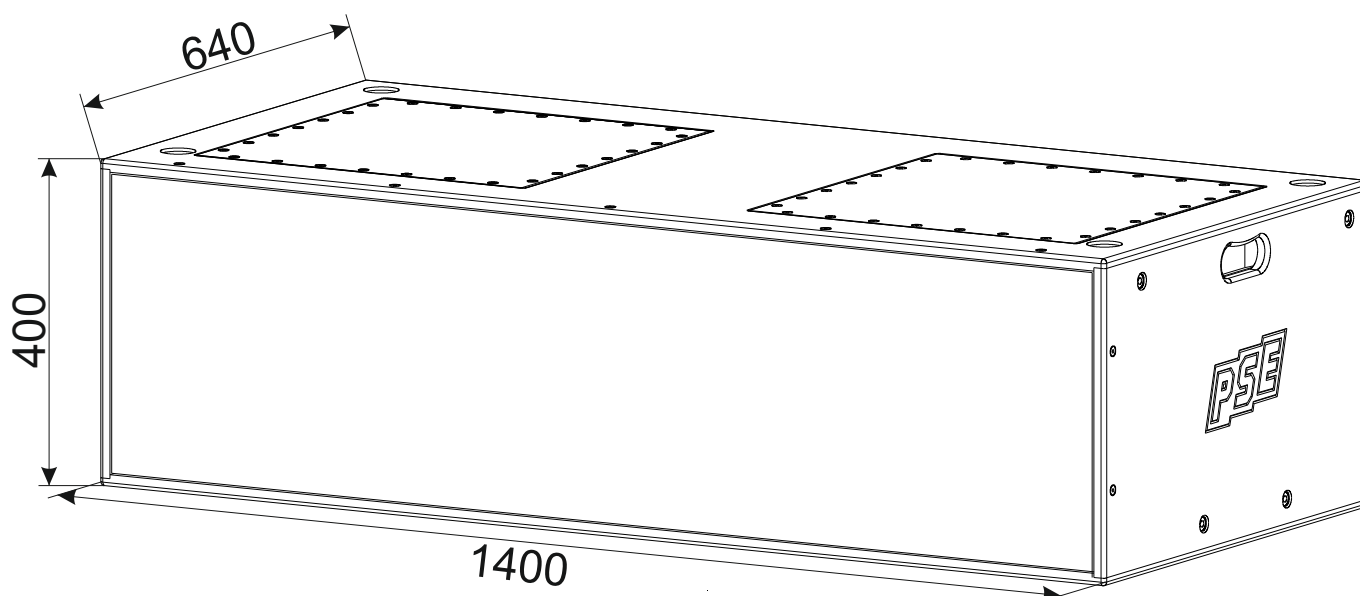

specification	
model	SB-215s
rated impedance (optional)	8Ω (4Ω, 16Ω)
power handling capacity AES/peak*	2000W / 6000W*
available frequency response**	32Hz-180Hz
max. sound pressure level***	133dB
LF-transducer rated size	2x15"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	1400/400/640
weight	66.5kg

* peak 10ms, with TD-8000 amplifier and SB-215s max controller setup

** -10dB with SB-215s FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and SB-215s SPL controller setup

Features SB-215s

- 2x15" neodymium speaker (4"/100mm voice coil)
- bandpass design
- 8 x M8 mounting points
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white