





SB-218

SUBWOOFER



Features SB-218

- 2x18" neodymium speaker (5"/125mm voice coil)
- bandpass design
- 12 x M8 mounting points
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

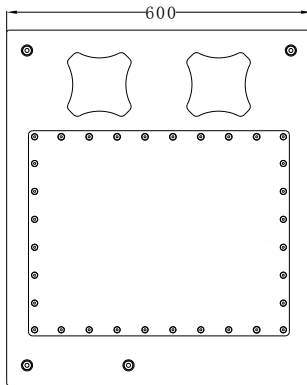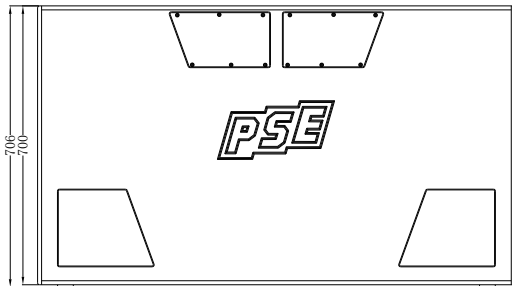

specification	
model	SB-218
rated impedance (optional)	8Ω (4Ω,16Ω)
power handling capacity AES/peak*	3000W / 9000W*
available frequency response**	28Hz-120Hz
max. sound pressure level***	137dB
LF-transducer rated size	2x18"
LF-transducer voice coil diameter	5"/125mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	1200/700/600
weight	93kg

* peak 10ms, with TD-8000 amplifier and SB-218 max controller setup

** -10dB with SB-218 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and SB-218 SPL controller setup

