






VB-218

SUBWOOFER



Features VB-218

- 2x18" Speaker (5"/125mm voice coil)
- bass reflex design
- European truck space optimized dimension
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 8 x rubber feet
- stackable in two directions
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white
- optional 4 steering caster on the back side
- optional front board with butterfly locks
- optional detto. with 4 steering caster

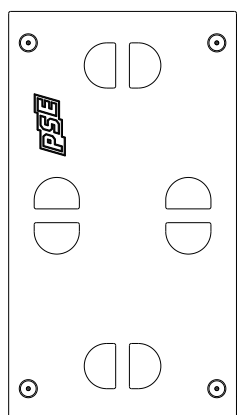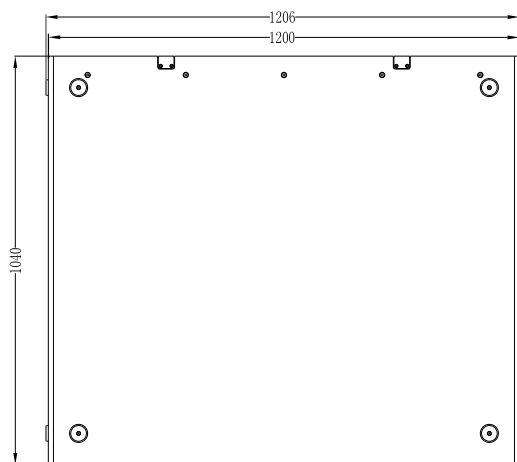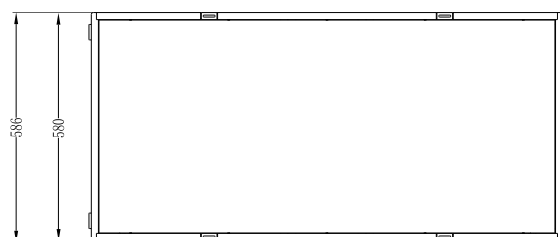

for stacking and rigging:

H:SYSTEM 1200

V:SYSTEM 580

specification

model	VB-218
rated impedance (optional)	8Ω (4Ω,16Ω)
power handling capacity AES/peak*	3000W / 9000W*
available frequency response**	30Hz-80Hz
max. sound pressure level***	140dB
LF-transducer rated size	2x18"
LF-transducer voice coil diameter	5"/125mm
LF-transducer magnet structure	ferrite
dimension w/h/d in mm	1200/580/1040
weight	112kg

* peak 10ms, with TD-8000 amplifier and VB-218 max controller setup

** -10dB with VB-218 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and VB-218 SPL controller setup

