






VB-218pro SUBWOOFER



Features VB-218pro

- 2x18" Neodymium speaker (6"/150mm voice coil)
- bass reflex design
- European norm truck optimized dimension
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 8 x rubber feet
- stackable in two directions
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white
- optional 4 steering caster on the back side
- optional front board with butterfly locks
- optional detto. with 4 steering caster

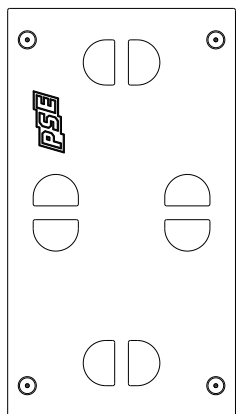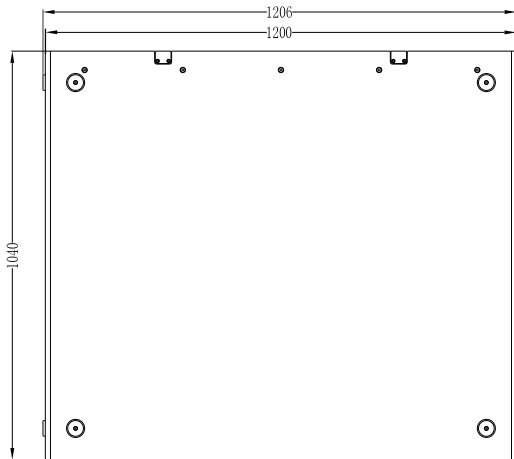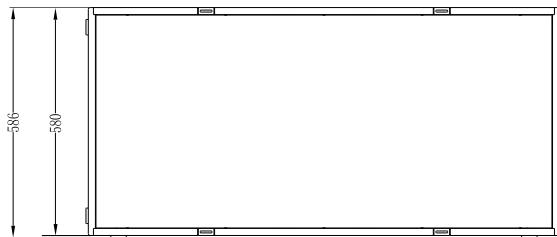

for stacking and rigging:

H:SYSTEM 1200

V:SYSTEM 580

specification	
model	VB-218pro
rated impedance (optional)	8Ω (4Ω, 16Ω)
power handling capacity AES/peak*	4000W / 12000W*
available frequency response**	30Hz-80Hz
max. sound pressure level***	142dB
LF-transducer rated size	2x18"
LF-transducer voice coil diameter	6"/150mm
LF-transducer magnet structure	neodymium
dimension w/h/d in mm	1200/580/1040
weight	98kg

* peak 10ms, with TD-8000 amplifier and VB-218pro max controller setup

** -10dB with VB-218pro FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and VB-218pro SPL controller setup

