



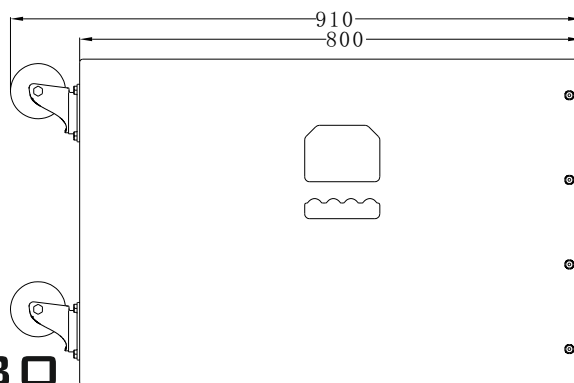



# B-15 SUBWOOFER

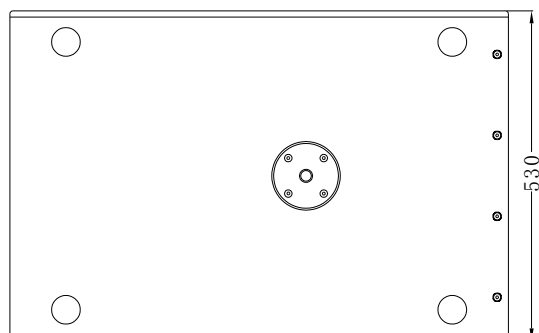

## Features B-15

- 15" speaker (4"/100mm voice coil)
- bass reflex design
- M20 pole mount plate
- 2 Neutrik speakon 4-pin
- bass link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- 4 x rubber feet
- stackable
- wood housing plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

## SYSTEM 530 for stacking and rigging

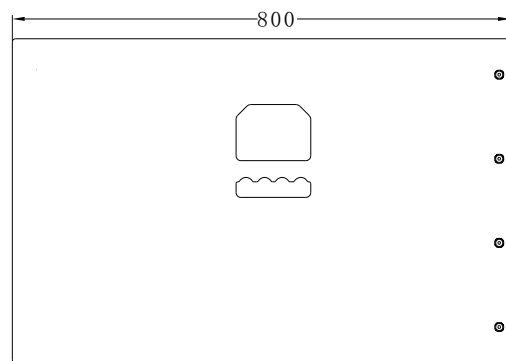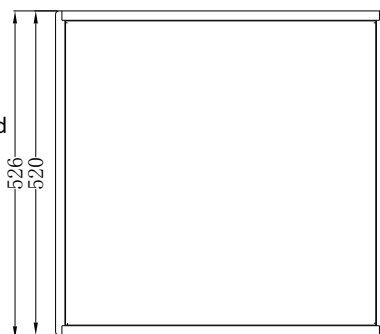

specification	
model	B-15
rated impedance (optional)	8Ω (16Ω)
power handling capacity AES/peak*	1000W / 3000W*
available frequency response**	35Hz-200Hz
max. sound pressure level***	132dB
LF-transducer rated size	15"
LF-transducer voice coil diameter	4"/100mm
LF-transducer magnet structure	ferrite
dimension w/h/d in mm	530/520/800
weight	35kg

\* peak 10ms, with TD-8000 amplifier and B-15 max controller setup

\*\* -10dB with B-15 FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and B-15 SPL controller setup

