







GX-10



COAXIAL

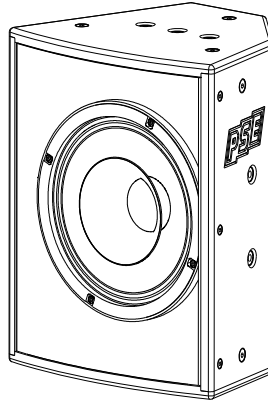

POINT SOURCE



specification

model	GX-10
rated impedance	8 Ω
operation mode	passive
power handling capacity passive AES/peak*	400W / 1200W*
available frequency response**	68Hz-20kHz
max. sound pressure level***	128dB
directivity (h x v)	80° conical
LF-transducer rated size	10"
LF-transducer voice coil diameter	64mm/2.5"
LF-transducer magnet structure	neodymium
HF-compression driver rated size (VC)	44mm/1,75"
HF-compression throat diameter	1"
HF-compression magnet structure	neodymium
dimension h/w/d in mm	380/320/270
weight	13.5kg

* peak 10ms, with TD-8000 amplifier and GX-10 max controller setup


** -10dB with GX-10 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and GX-10 SPL controller setup

Features GX-10

- 1x10"/1.75" coaxial speaker neodymium
- 10" transducer 64mm /2.5" voice coil
- 10" transducer neodymium magnet
- compression driver 1.75"/44mm voice coil
- compression driver neodymium magnet
- high frequency horn 1" throat
- horn directivity 80° conical
- multifunction housing
- wedge angle 45°
- tripod (pole mounting) flange
- 18 M8 mounting points
- 1 M10 mounting point
- 1 multi gauge plate 360° / 5° steps
- 2 Neutrik speakon 4-pin for passive
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating

small variety of wide range for bass cabinets extension

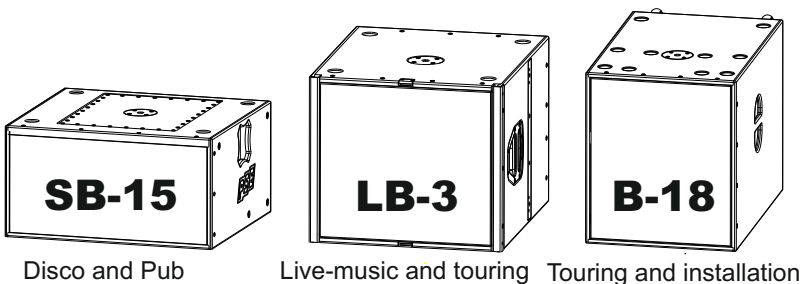

Appliance GX-10

- high-mid unit for fix installation
- high-mid unit for mobile PA
- fullrange PA cabinet
- floor monitor
- delay line

Application GX-10

- discotheque, clubs, bars, entertainment
- live events, live entertainment